




# DRIVE APPROACH REQUIREMENTS

# NOTICE

## Attention all Builders and Contractors:

The following requirements must be complied with on all Single Family Dwelling drive approaches:

- Compliance with APWA Standard Plan 221.1, 221.2 or 222 as applicable.
- Driveway maximum width 35' or half the frontage measurement, whichever is less; exceptions may apply; call city office (*per Herriman City Standards*)
- 6" depth of compacted untreated base course (APWA Section 32 11 23) – do not use gravel as a base course, 6" depth of concrete
- #4 gauge steel 2' long dowels 2' on center drilled into the curbside
- Sidewalk side full depth (6") expansion
- Concrete shall be Class 4,000 per APWA Standard 03 30 04
- Must be inspected by City Public Works Inspector *prior to pour* (call Building Department to schedule a drive approach inspection – you may request AM or PM)

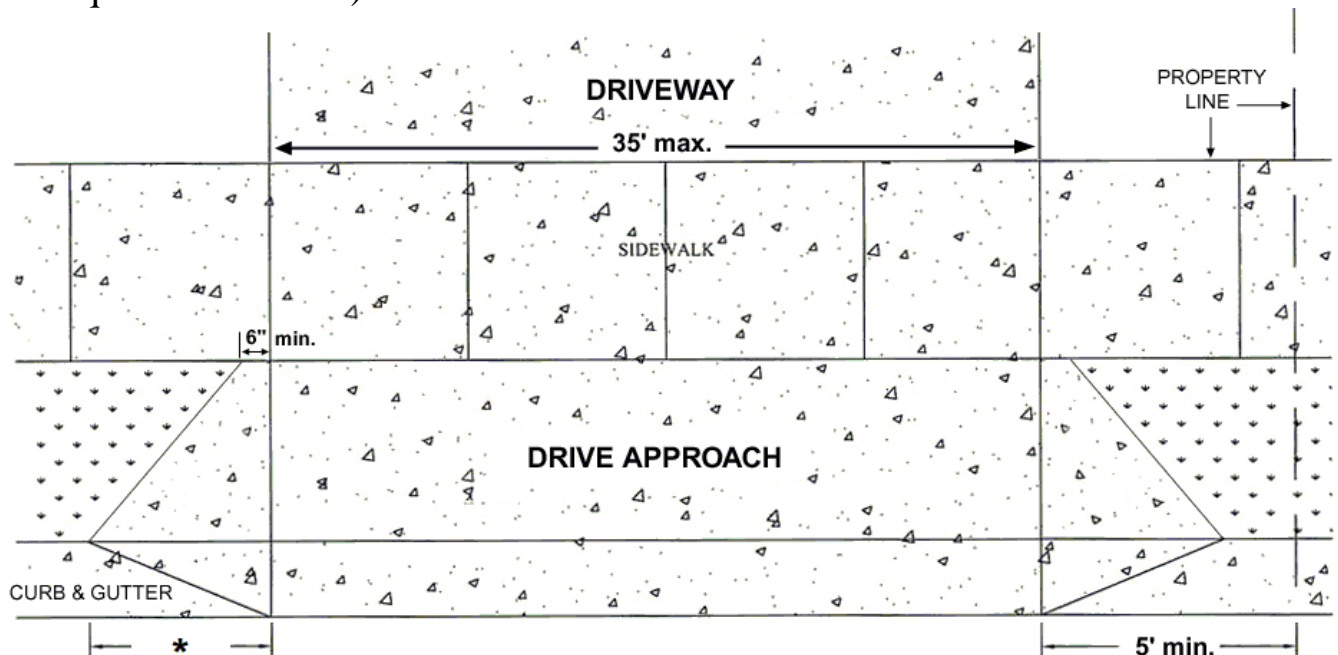

\*See applicable APWA Standard Plans as referred to above.