

NOTES:

1. TO INSTALL TREE IN A HOLE, ADD FIRST LAYER OF COMPACTED SOIL MIX, CUT AND REMOVE ALL BURLAP, TWINE AND WIRE FROM TOP $\frac{2}{3}$ OF BALL, AND ADD SECOND LAYER OF SOIL.
2. TYPICAL TREE PLANTING DEPTH: FROM ROOT FLARE TO BOTTOM OF BALL PLUS 2".
3. TYPICAL TREE PLANTING WIDTH: TWICE THE WIDTH OF THE BALL.


REVISIONS		DRAWN BY	REMARKS
NO.	DATE		


Herriman
 13011 S. Pioneer St. • Herriman, UT 84096

TREE PLANTING AND STAKING
 _____ DATE
 CITY ENGINEER

SHEET NAME

SHEET
LP-01

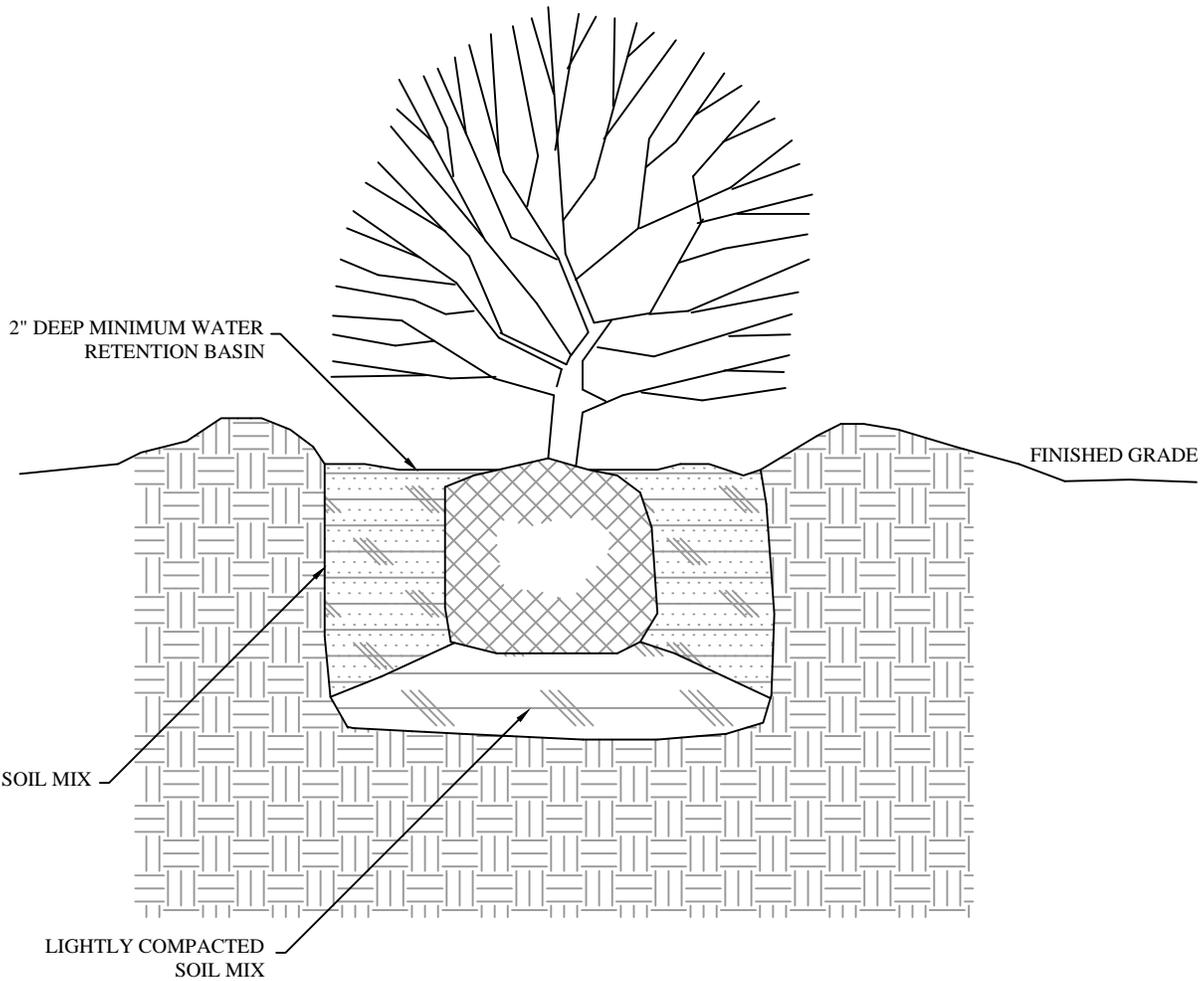

NOTES:

1. SOIL MIX FOR ALL TREES, SHRUBS AND GROUND COVER SHALL BE 30% EXISTING SOIL EXCAVATED FROM PLANT HOLE, 30% IMPORTED LOAMY TOPSOIL, 20% CLEAN COARSE SAND AND 20% PEAT MOSS.
2. PLACE AGRIFORM TABS IN EACH PLANTING PIT, BURIED 1/2 DEPTH OF BALL.
3. PLACE TABS AS FOLLOWS:
#1 & #2 SIZE - 1 TAB
#5 SIZE - 2 TABS
1 1/2" CAL. & UP - 3 TABS
4. PLACE TABS NO CLOSER THAN 18" APART.
5. TYPICAL SHRUB PLANTING DEPTH: DEPTH OF BALL PLUS 3"
6. TYPICAL SHRUB PLANTING WIDTH: WIDTH OF BALL PLUS 6"

REVISIONS		REMARKS
NO.	DATE	DRAWN BY



Herriman

Founded 1851


13011 S. Pioneer St. • Herriman, UT 84096

SHRUB PLANTING DETAIL


CITY ENGINEER _____ DATE _____

SHEET NAME _____


SHEET
LP-02

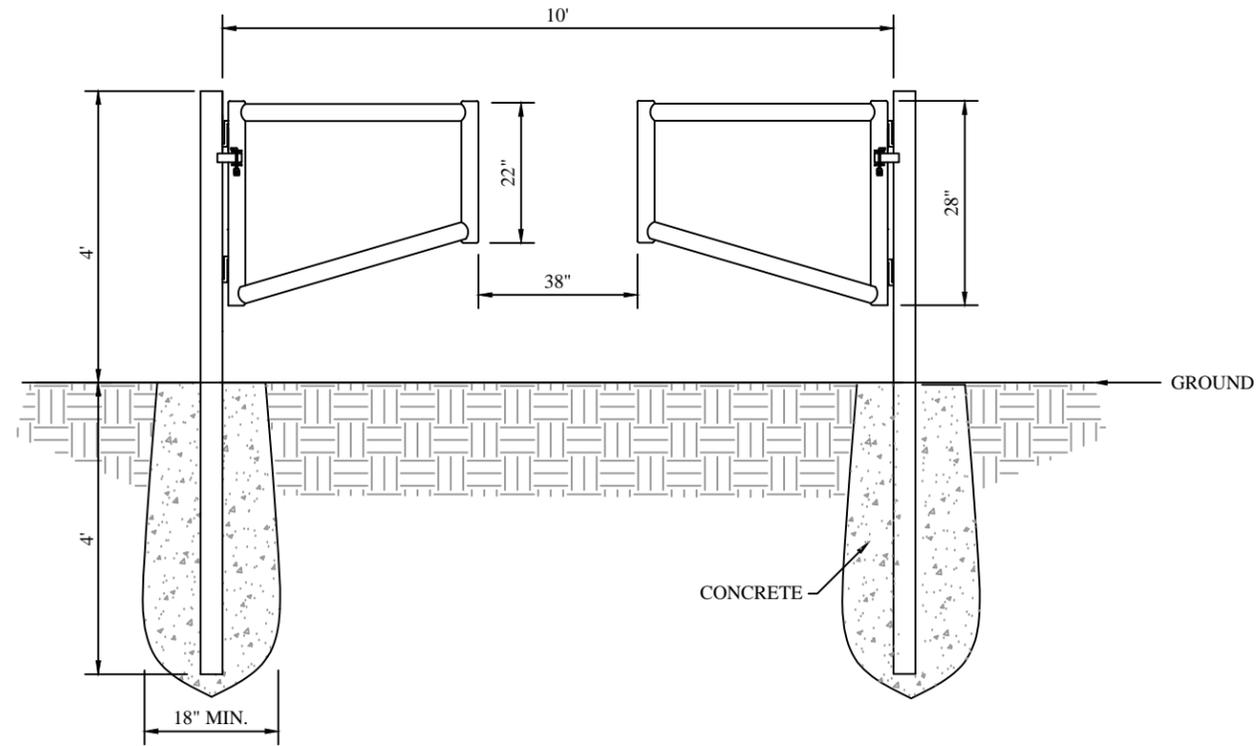


DOUBLE GATE CROSS SECTION

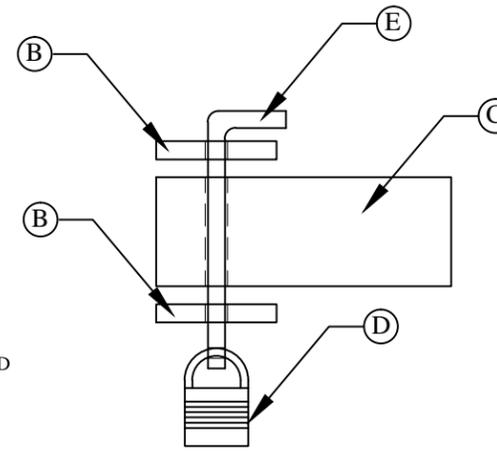

LOCK DETAIL FRONT VIEW

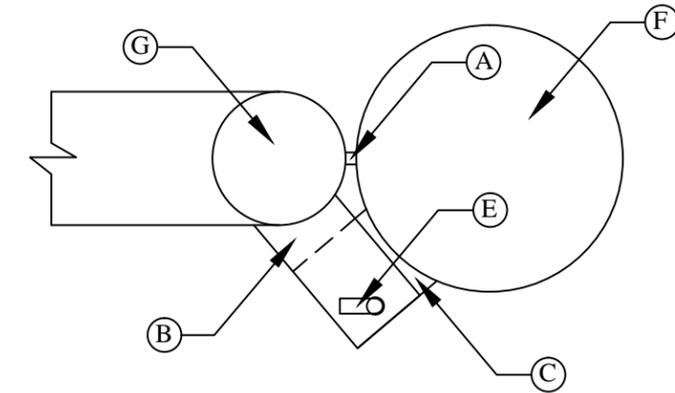

LOCK DETAIL TOP VIEW



PLAN VIEW

NOTES:

- GATE MUST SWING INTO HERRIMAN CITY PROPERTY.
- PRIME AND PAINT GATE ASSEMBLY GLOSSY BLACK.
- CUT AND WELD PIECES TO FIT.

LOCK PARTS LIST			
ITEM	QTY	DESCRIPTION	NOTE
(A)	4	HINGES	2
(B)	4	METAL PLATE	5
(C)	2	2" SQ. TUBE	7
(D)	2	PADDLE LOCK	1
(E)	2	LOCKING PIN	6
(F)	2	POST	3
(G)	2	GATE	4

NOTES FOR LOCK PARTS:

- ITS THE DEVELOPERS RESPONSIBILITY TO PROVIDE LOCKS FOR GATES. LOCK MUST BE KEYED TO HERRIMAN CITY STANDARD. LOCK IS TO BE A KRYPTONITE PL1002. LOCK CAN BE PURCHASED AT ARCHITECTURAL BUILDING SUPPLY (801)486-3481.
- THE HINGES MUST BE HEAVY DUTY HINGES FROM METAL MART.
- THE PIPE FOR THE POST IS 6" SCHEDULE 40 PIPE.
- THE GATE SHALL BE CONSTRUCTED OF 3" SCHEDULE 40 PIPE.
- THE METAL PLATE SHOULD BE 2 1/2" X 4" AND 1/4" THICK WITH A 3/8" HOLE FOR THE LOCKING PIN TO GO THROUGH AND MUST BE CUT AND WELDED ON APPROXIMATELY A 30% ANGLE TO THE 3" SCHEDULE 40 PIPE.
- THE LOCKING PIN IS MADE FROM 3/4" ROUND STALK THAT IS 7 1/2" TALL WITH A 2 1/2" BEND WITH A HOLE AT THE BOTTOM SO THAT THE LOCK CAN GO THROUGH.
- THE TUBING SHALL BE 2 1/2" SQ TUBING WITH A CAPPED END AND SHALL BE 4" LONG WITH A 3/8" HOLE FOR LOCKING PIN TO GO THROUGH CUT AND WELD ON AT APPROXIMATELY 30% ANGLE TO THE 6" SCHEDULE 40 PIPE.

NO.	DATE	DRAWN BY	REMARKS



Herriman
 Founded 1851
 13011 S. Pioneer St. • Herriman, UT 84096

GATE ASSEMBLY FOR TRAIL HEAD


SHEET NAME

SHEET
LP-03

CITY ENGINEER _____ DATE _____

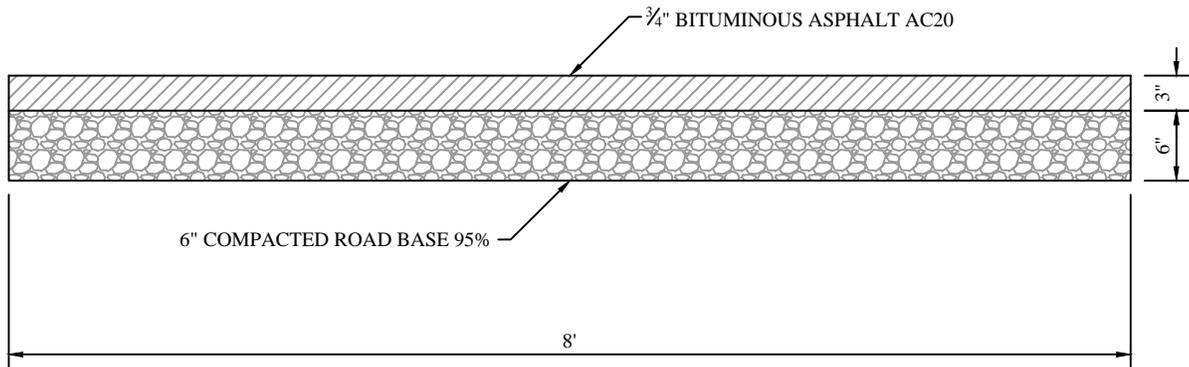

HARD SURFACE / PEDESTRIAN TRAIL

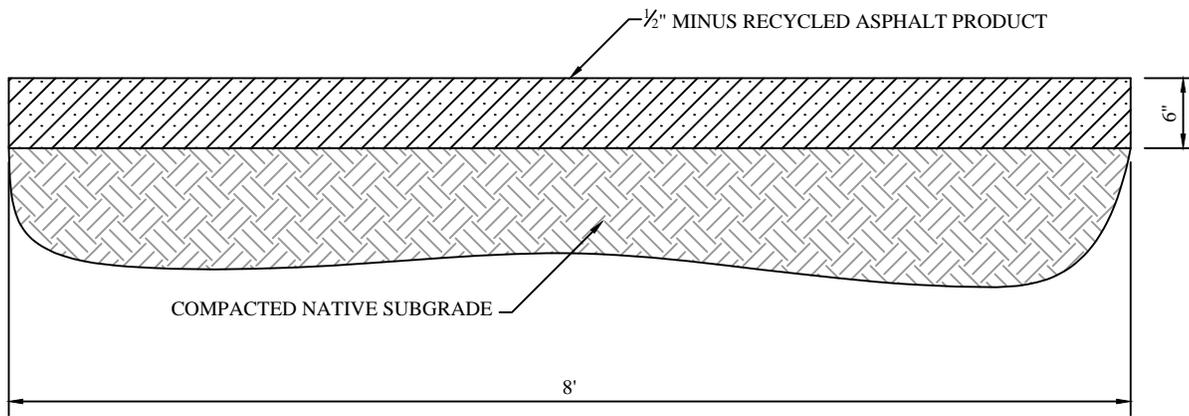

SOFT SURFACE / EQUESTRIAN TRAIL

REVISIONS		REMARKS
NO.	DATE	DRAWN BY

Founded 1851


Herriman

13011 S. Pioneer St. • Herriman, UT 84096


TRAIL DETAIL

SHEET NAME _____ DATE _____


CITY ENGINEER _____

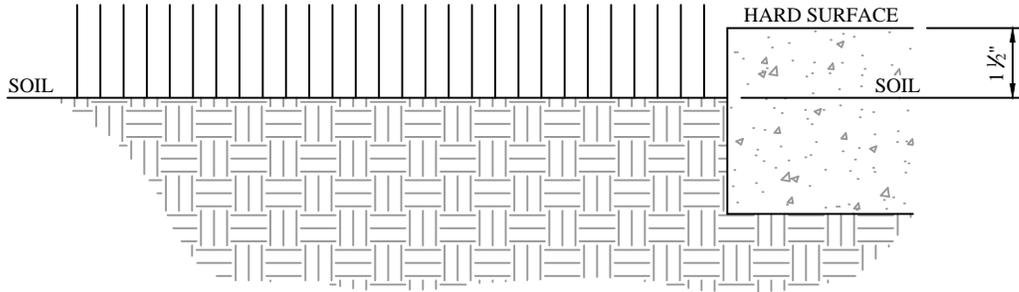

A DETAIL - EXISTING
SCALE: NO SCALE

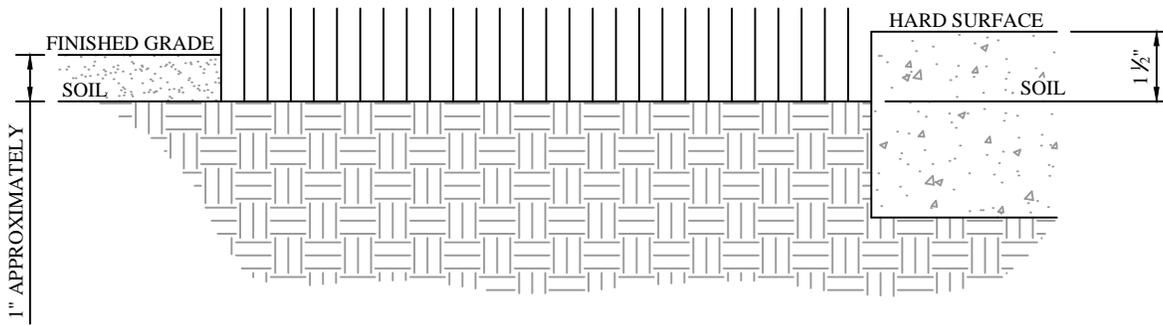

B DETAIL - SEEDING
SCALE: NO SCALE

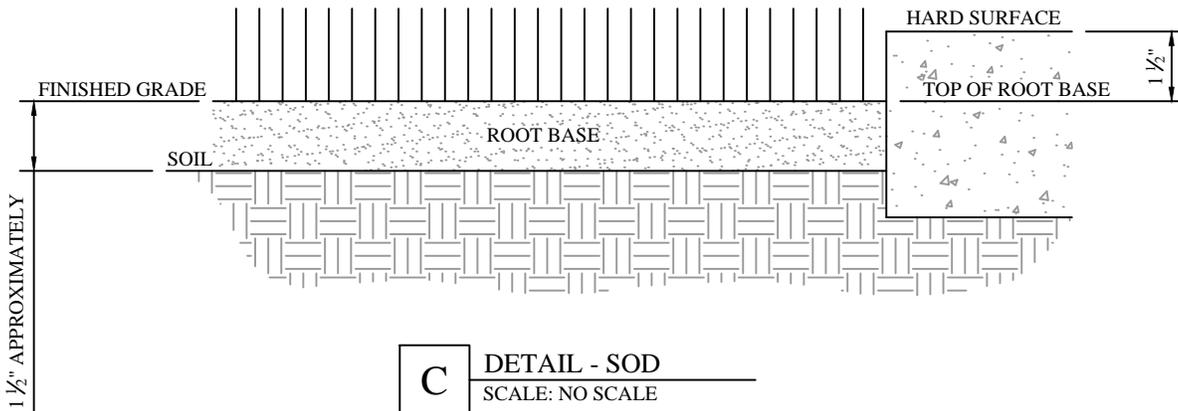

C DETAIL - SOD
SCALE: NO SCALE

REVISIONS		REMARKS
NO.	DATE	DRAWN BY


Herriman
 13011 S. Pioneer St. • Herriman, UT 84096

SHEET NAME: FINISH GRADE
 CITY ENGINEER: _____
 DATE: _____

SHEET
LP-05